

Lithium battery protection board  
(EK-BM3R10S40A)  
Product Datasheet

## Shenzhen Enerkey BMS Power Technology Co., Ltd.

Product Name	Lithium battery protection board
Product Model	EK-BM3R10S40A
Version	V1.0
Adapt Battery String	3S/4S/5S/6S/7S/8S/9S/10S
Adapt Battery Type	Li-ion/LiFePO4/Lto/SIB
Function	Overcharge protection, over-discharge protection, over-current protection, over-temperature protection, short-circuit protection
Effective date	28th.Feb.2025

Product change history			
Version	Date	Change point description	Approve
V1.0	2025-02-28	Initial version	

Website	<a href="http://www.enerkeybms.com">www.enerkeybms.com</a>
Mobile No.	+86 15387469240
Address	Area A, 9th Floor, Building G, Guancheng Low Carbon Industrial Park, Shangcun Community, Gongming Street, Guangming District, Shenzhen, China, 518106

---

# Contents

<b>1. Overview .....</b>	<b>1</b>
<b>2. Technical Parameters .....</b>	<b>1</b>
<b>3. Product Photo.....</b>	<b>2</b>
1) Product Appearance.....	2
2) Accessories .....	3
<b>4. Product Drawing.....</b>	<b>3</b>
<b>5. Product wiring diagram.....</b>	<b>4</b>
1). Wiring diagram.....	4
3). Precautions for wiring .....	8
<b>6. Frequently Asked Questions.....</b>	<b>8</b>
<b>7. Environmental substance requirements .....</b>	<b>9</b>
<b>8. Safety protection measures, transportation and storage .....</b>	<b>9</b>
1) Safety protection measures .....	9
2) Packaging and shipping .....	9
3) Storage.....	10

Enerkey

## 1. Overview

- ①. This series of lithium battery protection boards is a power management system (BMS) tailored for ternary lithium batteries.
- ②. This series of lithium battery protection boards uses automotive-grade MOS, 2oz thickened copper foil and copper strips for current sharing, making the protection board highly precise, with ultra-low internal resistance and ultra-low heat generation.
- ③. On the basis of basic protection board functions such as overcharge protection, over-discharge protection, over-current protection, over-temperature protection, short-circuit protection, etc., a balancing function, reset function, electrostatic protection, dust-proof protection and moisture protection are added.
- ④. This lithium battery protection board (EK-BM3R10S40A) adopts 3S and 4S and 5S and 6S and 7S and 8S and 9S and 10S integrated solutions. You can flexibly select the required number of strings according to the wiring diagram provided by our company.
- ⑤. It is mostly used in the battery packs of electric scooters, electric bicycles, power tools, car washers, small household appliances, model aircraft and other products. Mainly plays the role of protecting the battery pack.

## 2. Technical Parameters


	Item type		Parameters							
1	Parameter Overview	Product Model	EK-BM3R10S40A							
		Product Size(mm)	L77.5*W28*T5							
		Product Weight(kg)	0.08							
		Product Material	FR-4 / Lead-free spray tin							
		Applicable battery type	Lifepo4	Li-ion	Lto	SIB				
		Applicable battery string	3S/4S/5S/6S/7S/8S/9S/10S							
		Rated discharge current	40A	40A	40A	40A				
		Peak starting current	80A	80A	80A	80A				
	Item type	Trigger (time)	Trigger (time)	Trigger (time)	Trigger (time)	Trigger (time)	Trigger (time)	Trigger (time)	Trigger (time)	
2	Charging protection	Overvoltage protection voltage value	3.65V/1S	3.50V/1S	4.25V/1S	4.05V/1S	2.85V/1S	2.75V/1S	3.95V/1S	3.80V/1S
		Overcurrent value	40A/2S, disconnect charger to recover							
		Low temperature value	Charge over-temperature protection 60℃/2S / Release 55℃/2S							
		Overtemperature value	Charging low temperature protection -5℃/2S / Release 0℃/2S							
3	Discharge protection	Undervoltage protection voltage value	2.30V/1S	2.70V/1S	2.75V/1S	3.0V/1S	1.70V/1S	1.80V/1S	1.50V/1S	2.00V/1S
		①Overcurrent protection value	45A/2S, disconnect load or activate charging							
		②Overcurrent protection value	80A/0.5S, disconnect load or activate charging							
		Short circuit protection value	100A/128uS, disconnect load or charge activated							
		Low temperature value	Discharge over-temperature protection 65℃/2S, release 60℃/2S							




		Overtemperature value	Discharge low temperature protection -20°C/2S, release -10°C/2S
4	Others	Standby current consumption	25uA
		Motherboard lock voltage	/

### 3. Product Photo

#### 1) Product Appearance

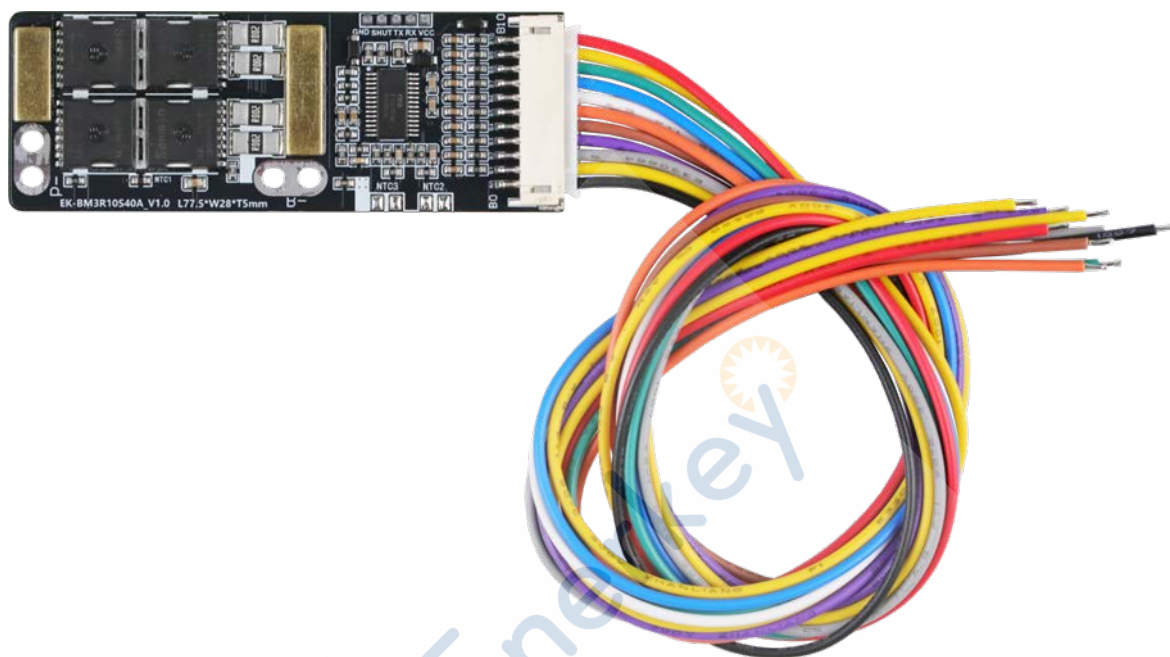

Front

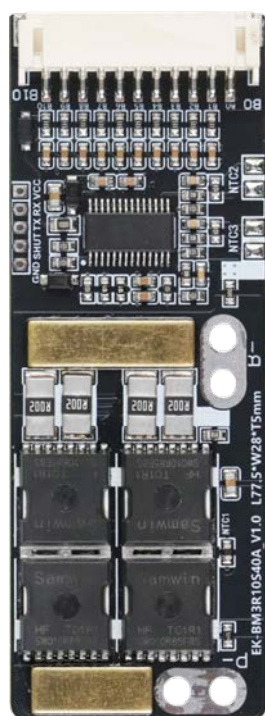

Back



Special Note:

- ①. All products shipped are coated with conformal coating.


## 2) Accessories

- ① . NTC Terminal cable



Thermistor terminal cable specifications					
Terminal Specification	Resistance	B value	length	Q'ty	Remark
PH2.0mm_2Pin	10K 1%	B3435	100cm	2	Customizable


- ② . Terminal cable

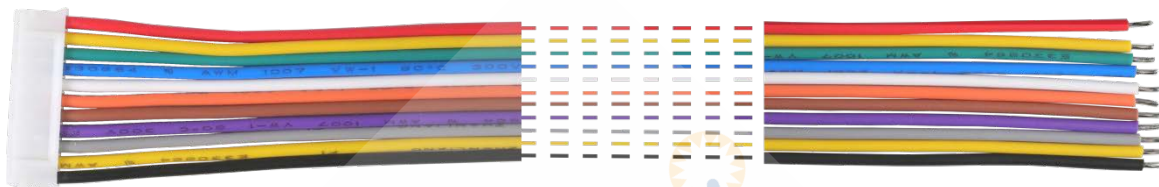

Terminal cable specifications					
Terminal Specification	Material	Number	length	Stripping length	Q'ty
PH2.0mm_11Pin	Cu	22AWG	40cm	3cm	1

## 4. Product Drawing

(No tolerance noted:  $\pm 0.15$ , Unit: mm)

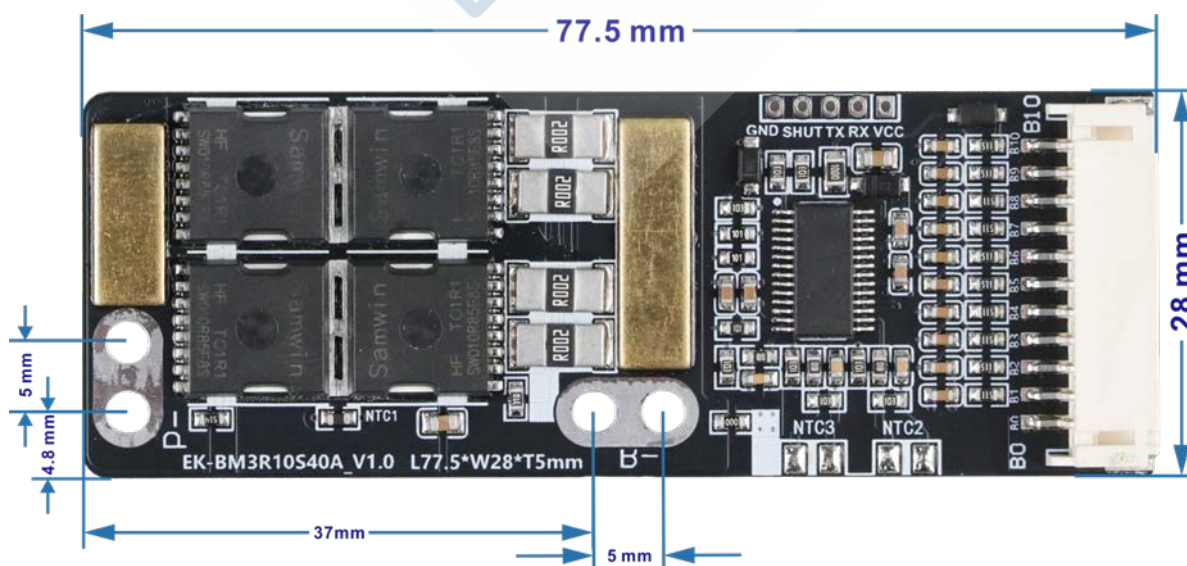

Material	FR-4	Layer	2 layer
PCB thickness	1.6±0.10	Copper(CU) thickness	2.0 oz
Pads plating	Lead-free spray tin	Plate thickness	
Solder	Black	Silkscreen	White

## 5. Product wiring diagram

### 1). Wiring diagram

EK-BM3R10S40A supports 3-strings , The wiring method is shown in "Figure 5.1.1".

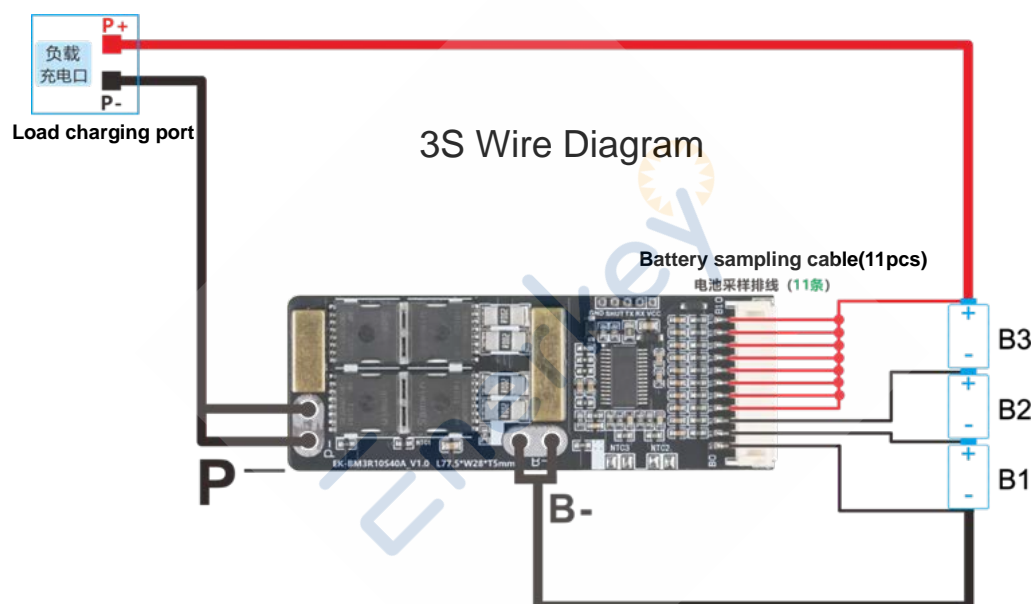


Figure 5.1.1

EK-BM3R10S40A supports 4-strings , The wiring method is shown in "Figure 5.1.2".

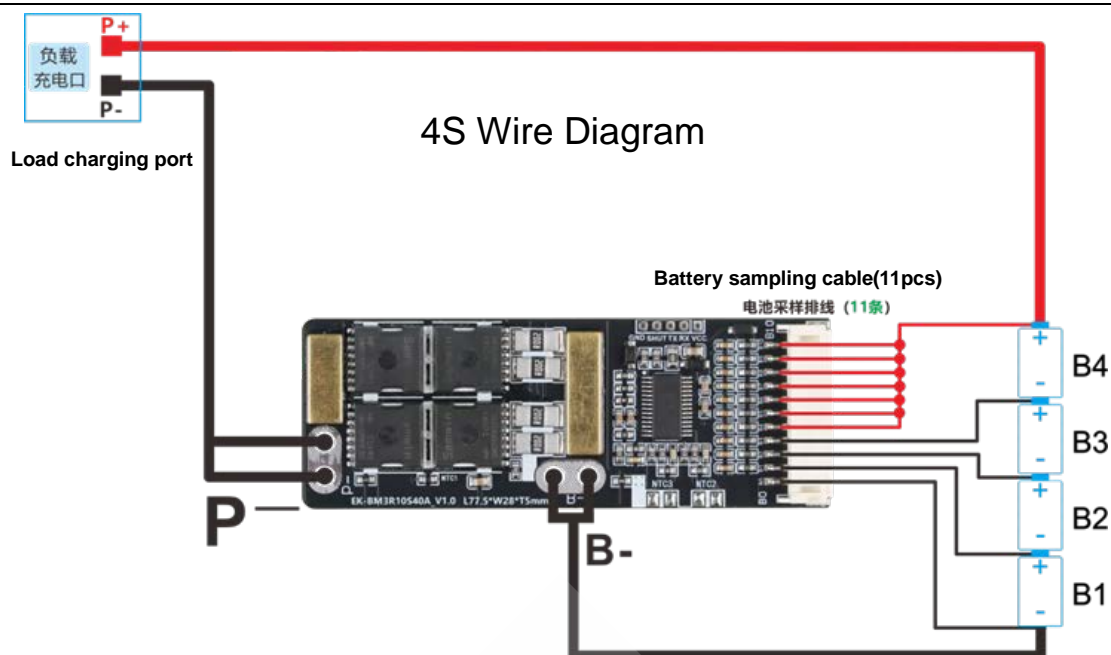


Figure 5.1.2

EK-BM3R10S40A supports 5-strings , The wiring method is shown in "Figure 5.1.3".

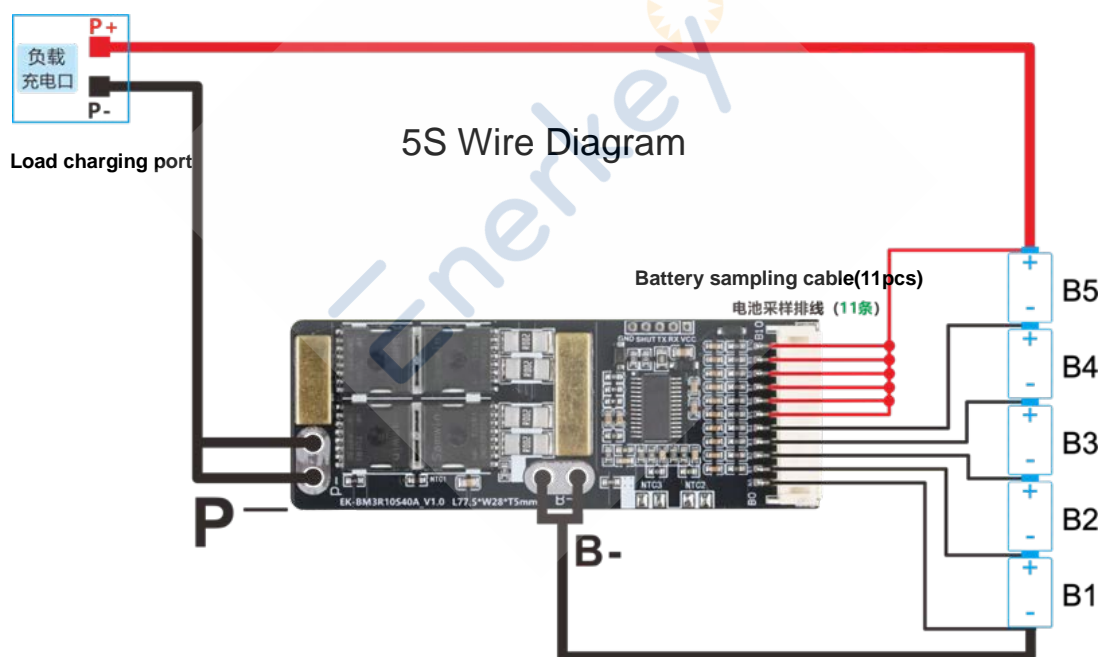


Figure 5.1.3

EK-BM3R10S40A supports 6-strings , The wiring method is shown in "Figure 5.1.4".

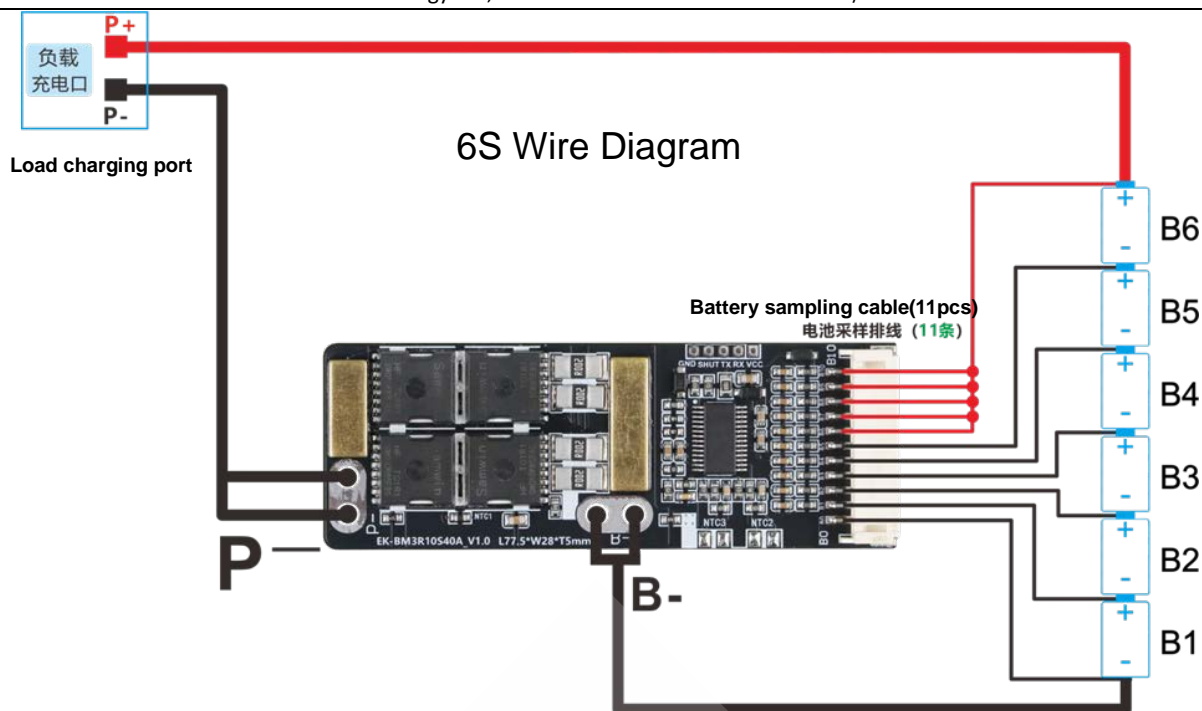


Figure 5.1.4

EK-BM3R10S40A supports 7-strings , The wiring method is shown in "Figure 5.1.5".

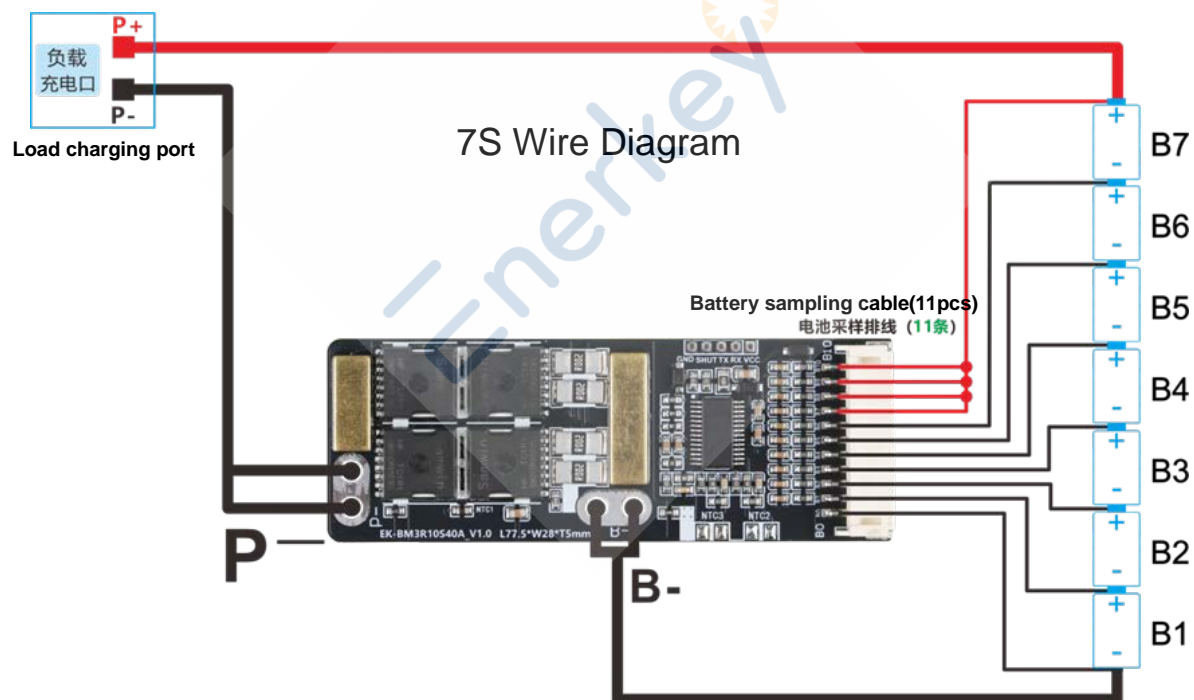


Figure 5.1.5

EK-BM3R10S40A supports 8-strings , The wiring method is shown in "Figure 5.1.6".





**9S Wire Diagram**

The diagram illustrates the wiring for a 9S battery pack. The battery pack consists of 9 cells (B1 to B9) connected in series. The positive terminal of the battery pack is connected to the P+ terminal of the load charging port. The negative terminal of the battery pack is connected to the P- terminal of the load charging port. The battery pack is also connected to a central PCB via a 9S connector. The PCB contains a microcontroller and other components. The battery sampling cable (11 pins) is connected to the PCB via a 11-pin connector. The load charging port is connected to the PCB via a 2-pin connector.

— 7 —

EK-BM3R10S40A supports 10-strings, The wiring method is shown in "Figure 5.1.8".

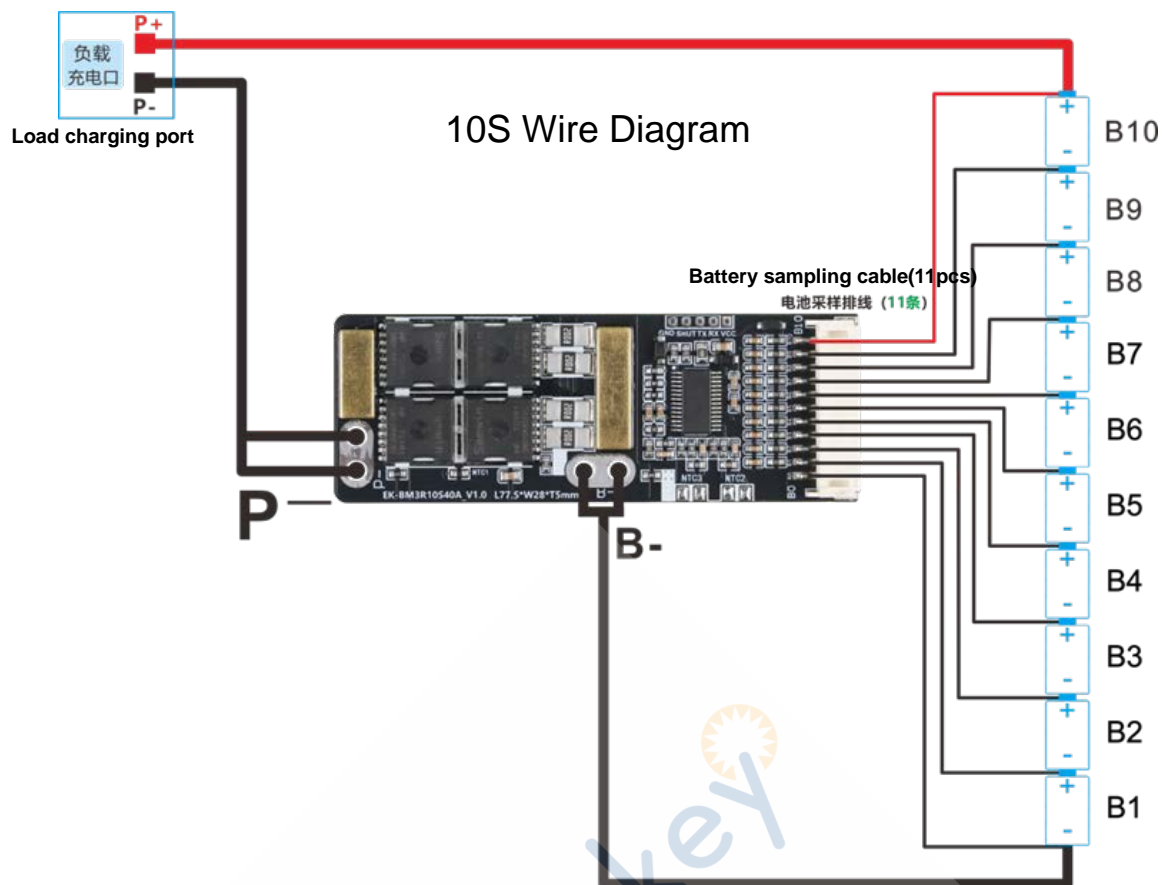


Figure 5.1.8

### 3). Precautions for wiring

- ①. Installing the battery protective board requires a certain amount of technical electronic knowledge.
- ②. When wiring, first connect the B- line at the soldering pad position to the total negative terminal of the battery (the B- line should be soldered to a short and thick wire).

And first solder the wired terminals to the battery pack, and then insert the protective plate.

- ③. The connection between the battery terminal B- and the protection board terminal B- should be short and thick, otherwise it will cause the protection board to charge and discharge in advance and malfunction.

You need to use thick wires when wiring P+/P-. Wires that are too thin and too long will burn the board!

- ④. After connecting the battery, please pay attention to the insulation protection of the product to avoid short circuit when the power is on;

## 6. Frequently Asked Questions

Phenomenon	Solution
------------	----------

After the protective board is installed, No output or wrong output voltage	<p>① Activate the protection board: Connect the charger to power on or short-circuit P- and B- for 2-3 seconds, and then measure whether the output voltage is normal;</p> <p>② The wiring order is wrong: measure whether the voltage of each battery string is normal.</p>
After the protective board is installed, After using it for a while, the power was cut off.	Check whether the installation position of the NTC probe is normal, It should be installed close to the battery and not placed on the protective board.

## 7. Environmental substance requirements

Each battery corresponds to an LED indicator, and you can clearly observe whether each cell is balanced.

Harmful Substance	Limit standard (mg/kg)
Lead (Pb)	1000
Cadmium (Cd)	100
Mercury (Hg)	1000
Hexavalent chromium (Cr6+)	1000
Polybrominated biphenyls (PBB)	1000
Polybrominated diphenyl ethers (PBDE)	1000

## 8. Safety protection measures, transportation and storage

### 1) Safety protection measures

①. There is no high voltage in the protection board board itself, and it will not cause electric shock damage to the body.

②. Do not repair the balancing board while the power is on. All repairs should be performed by qualified service personnel.

If the working voltage set by the factory is changed, the safety certificate no longer applies.

③. When using, please pay attention to the insulation treatment of the product to avoid short circuit.

④. Pay attention to ESD protection when using this product.

⑤. This product complies with the company's thrust standards: 0402 components  $\geq 1.0\text{KgF}$ ; 0603 components  $\geq 1.5\text{KgF}$ ; IC and MOS tubes  $\geq 2.0\text{KgF}$ .

### 2) Packaging and shipping

①. Separate and package PCBA with anti-static bubble bags.

②. The packed products can be transported by ordinary means of transportation when they are not directly affected by rain, snow or violent collisions and bumps.



It is not allowed to be placed together with corrosive substances such as acids and alkalis during transportation.

### 3) Storage

Packaged products should be stored in a permanent warehouse with a temperature of 0°C~35°C and a relative humidity of no more than 80%.

The warehouse should be free of acid, alkali and corrosive gases, strong mechanical vibration and impact, and no strong magnetic field.

